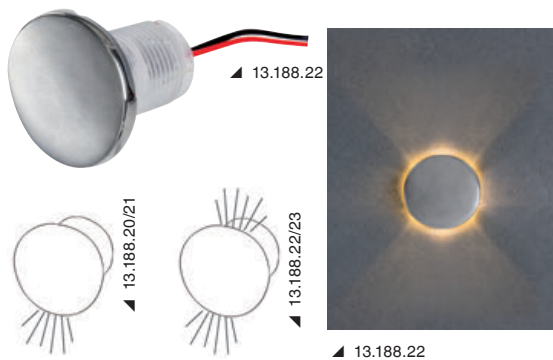


**New**


ROUND built-in LED courtesy lights

IP67

AISI 316

Technopolymer body. Cover in AISI 316 stainless steel, mirror polished.

Code	Version	V	W	lumen	LED beam angle	No of LEDs	Light colour	$\left \longleftrightarrow \right $ mm
13.188.20	Downward light	12	0.6	9	120°	6	 white	Ø33.1x7.2 h
13.188.21	Downward light	12	0.6	3	120°	6	 blue	Ø33.1x7.2 h
13.188.22	Double up/downward light	12	0.6	16	120°	6	 white	Ø33.1x7.2 h
13.188.23	Double up/downward light	12	0.6	5	120°	6	 blue	Ø33.1x7.2 h

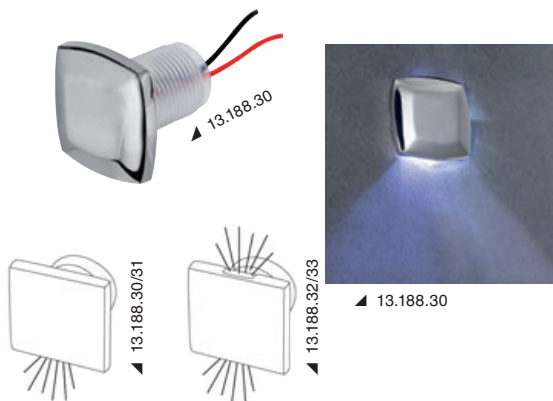**New**


SQUARE recessed LED courtesy lights.

IP67

AISI 316

Technopolymer body. Cover in AISI 316 stainless steel, mirror polished.

Code	Version	V	W	lu- men	LED beam angle	No of LEDs	Light colour	$\longleftrightarrow$ mm
13.188.30	Downward light	12	0.6	9	120°	6	 white	33.1x33.1x7.2 h
13.188.31	Downward light	12	0.6	3	120°	6	 blue	33.1x33.1x7.2 h
13.188.32	Double up/downward light	12	0.6	16	120°	6	 white	33.1x33.1x7.2 h
13.188.33	Double up/downward light	12	0.6	5	120°	6	 blue	33.1x33.1x7.2 h

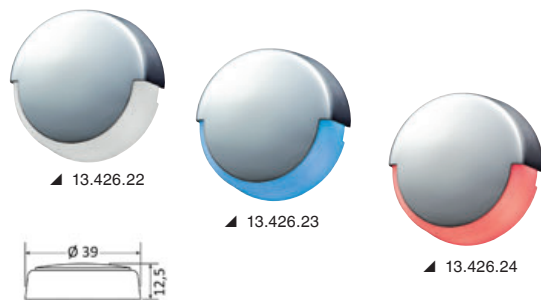


Aara LED courtesy light, recessless version - downward orientation

IP67

FLUSH MOUNT

White plastic body, mirror-polished stainless steel front. Mounting via screw.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	↔ mm
13.426.22	12	0.5	25	3000	180°	6	 white	39x12.5
13.426.23	12	0.5	10	-	180°	6	 blue	39x12.5
13.426.24	12	0.5	10	-	180°	6	 red	39x12.5

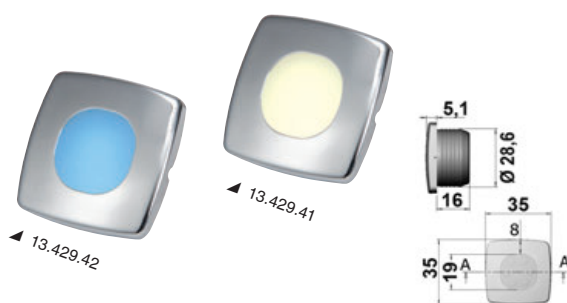

LED courtesy light for recess mounting - frontal orientation

IP65

Polycarbonate body. Mirror polished stainless steel front panel. Push-fit mounting.


Code	V	W	lu- men	K	LED beam angle	No of LEDs	Light colour	$\longleftrightarrow$ mm		
								Ø Recess	Exter- ior	Ove- rhang
13.429.41	12/24	0.4	20	3000	110°	2 LED HD 5 mm	 white	28.6	35x35	5.1
13.429.42	12/24	0.4	10	-	110°	2 LED HD 5 mm	 blue	28.6	35x35	5.1

Recess fit LED ceiling light - frontal orientation

IP65

AISI 316

Stainless steel body. Can be used as mood lighting under the planks. Pressure mounting.

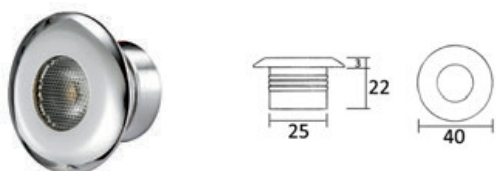

Code	Finishing	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.429.10	Mirror-polished	12/24	1	110	3000	25°	1	 white
13.429.11	Mirror-polished	12/24	1	45	-	25°	1	 blue
13.429.12	Mirror-polished	12/24	1	45	-	25°	1	 red
13.429.20	Mirror-polished	12/24	3	190	3000	25°	3	 white
13.429.21	Mirror-polished	12/24	3	74	-	25°	3	 blue