

Trimmer anchor swivelling connector

AISI 316

Polished AISI 316 stainless steel. Fitted with a double joint to avoid the lever boom effect with held-on anchor. Anti-oscillation connection to the anchor during lifting when approaching the roller/bow. Safety screws. Side load 3 times as powerful as traditional connectors.

Code	Chain Ø mm	Breaking load kg	A mm	B mm	C mm
01.739.01	6/8	3200	200	15	7/17
01.739.02	10/12	8500	230	22	20/30
01.739.03	12	12000	235	27	30/50

Douglas Marine




Rope/chain connector

AISI 316

Designed to connect the anchor chain into the respective line, without knots; it is also suitable for stern mooring. Made of **mirror-polished AISI 316 stainless steel**.

Code	Chain Ø mm	For line Ø mm
01.230.01	6	10
01.230.02	8	12

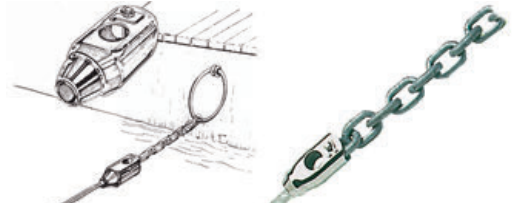


Chain link for calibrated chain

AISI 316

In **stainless steel AISI 316**. High strength due to the structure with 8 sealing pins, calibrated for winches, thus **they run perfectly in the gypsy avoiding dangerous jamming**.

Code	Breaking load kg	Ø D mm	A mm	B mm
01.672.06	1630	6	31.5	20.5
01.672.08	3200	8	40.5	26.5
01.672.10	5000	10	50.5	35.5
01.672.12	6500	12	61	40.5


OSCULATI

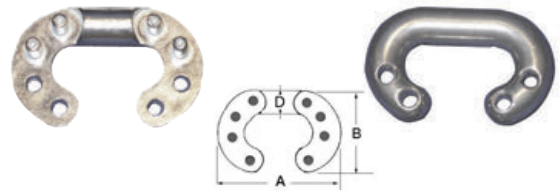

Chain link

Made of stainless steel, for calibrated chain

Stainless steel	Ø D Chain mm	Breaking load kg	A1 mm	A mm	L mm	L1 mm
01.671.06	6	700	11	23	21	21
01.671.08	8	1240	12.5	29	24	24
01.671.10	10	1940	15	34.5	29	29
01.671.12	12	2780	19	42	38	38



Galvanized steel swivel made for anchor chains and buoys

Double eye, ideal for mooring lines

Code	Breaking load kg	A mm	B mm	b1 mm	L mm	L1 mm
01.427.10	5000	10	51	30.8	125	23.5
01.427.12	8000	13	63	36	165	33
01.427.14	11700	16	75.5	42.6	200	40.8
01.427.16	16300	19	88.5	50	225	42.8



AISI316 stainless steel swivel

Double eye, ideal for mooring lines.

Code	Breaking load kg	A mm	B mm	b1 mm	L mm	L1 mm
01.018.04	450	4	19.5	11.5	50	13
01.018.05	650	5	23	13	60	13
01.018.06	1200	6	26	15	65	15
01.018.08	1900	8	35	20	90	22
01.018.10	3500	10	44	24	115	27
01.018.13	5000	13	59	33	148	33
01.018.16	6500	16	75	39	188	42



Mirror-polished AISI 316 stainless steel swivel

Very sturdy, forged steel, ideal for mooring buoys, halyards, anchor chains, etc.

Shackle + shackle	Shackle + shackle (flush pin)	Eye + shackle	Eye + shackle (flush pin)	A mm	B mm	C mm	D mm
01.428.99	-	01.427.99	-	60	10	11	5
01.429.00	01.439.00	01.428.00	01.438.00	66	12	11	6
01.429.01	01.439.01	01.428.01	01.438.01	88	16	16	8
01.429.02	01.439.02	01.428.02	01.438.02	113	20	22	10
01.429.03	01.439.03	01.428.03	-	152	26	28	13
01.429.04	-	01.428.04	-	188	32	36	16

