


## Atlantic Portlight

The Atlantic Portlight has clean lines and a clear, acrylic window housed in an attractive aluminium frame

- Extensive range
- Flyscreens provided as standard
- Friction hinges
- Screw handles available as an option
- Full range of spare parts available on-line [www.lewmar.com](http://www.lewmar.com)

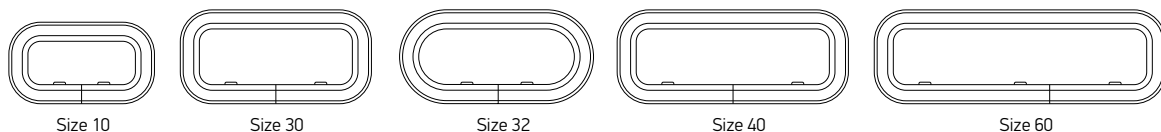

### Specifications options:

- Clip handles standard / Screw handles optional
- Acrylic colour: Grey (standard) other colour optional
- Frame colour: Silver anodized (standard) other finish available
- Come complete with alloy valance and flyscreen
- Portlights and fixed lights come complete with fastenings as indicated in the table


### Portlight Valance & Fastening

HULL THICKNESS MM	VALANCE TYPE	FASTENING	
8-10	Thin Hull Valance	<b>360360999</b> <sup>1</sup>	M5 x 12mm Long
11-15	Thin Hull Valance	<b>360361999</b>	M5 x 16mm Long
16-19	Thick Hull Valance	<b>360362999</b>	M5 x 20mm Long
20-24	Thick Hull Valance	<b>360363999</b> <sup>2</sup>	M5 x 25mm Long


<sup>1</sup> Supplied as standard with thin hull valances  
<sup>2</sup> Supplied as standard with thick hull valances

Fastenings supplied in bags of 100

### Atlantic Portlight Dimensions

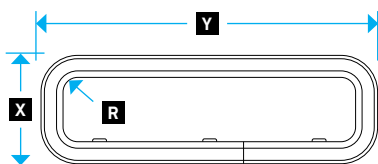

### Atlantic Portlight Cut-out



PART NUMBER		OVERALL DIMENSIONS										CUT-OUT DIMENSIONS						PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
Thin Valance	Thick Valance	Size	X LENGTH		Y WIDTH		Z HEIGHT		R RADII		X1 LENGTH		Y1 WIDTH		R1 RADII		kg	lb	mm	in	
<b>39110090</b>	<b>39110070</b>	10	174	6 15/16	304	12	6	1/4	71	2 13/16	154	6 1/16	284	11 3/16	61	2 3/8	1.6	3.5	8	5/16	
<b>39130090</b>	<b>39130070</b>	30	200	7 7/8	400	15 3/4	6	1/4	71	2 13/16	180	7 1/16	380	14 15/16	61	2 3/8	2.2	4.8	8	5/16	
<b>39132090</b>	<b>39132070</b>	32	198	7 13/16	401	15 13/16	6	1/4	99	3 7/8	178	7	381	15	89	3 1/2	2.1	4.6	8	5/16	
<b>39140090</b>	<b>39140070</b>	40	200	7 7/8	480	18 7/8	6	1/4	71	2 13/16	180	7 1/16	460	18 1/8	61	2 3/8	2.5	5.5	8	5/16	
<b>39160090</b>	<b>39160070</b>	60	200	7 7/8	600	23 5/8	6	1/4	71	2 13/16	180	7 1/16	580	22 13/16	61	2 3/8	3.0	6.6	8	5/16	

Smoke grey acrylic and silver anodise frames  
 Should be fitted to a flat surface with a max tolerance of ± 1mm  
 Come complete with fastenings as indicated on above table

Portlight opening is restricted on very thick hulls.  
 At 24mm hull thickness opening angle is 115°