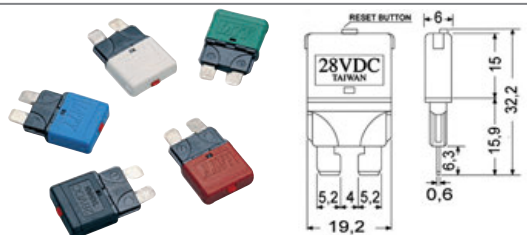
**Standard blade fuses with warning LED light**

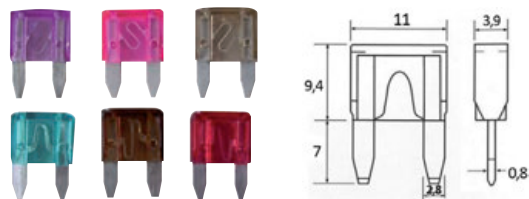
The LED lights up when the fuse burns out.

Code	A	ORDER BY BOX
14.003.05	5	50
14.003.10	10	50
14.003.15	15	50
14.003.20	20	50
14.003.30	30	50

**Resettable blade fuses, 12/24 V**

Standard resetting by pushing the manual head button.

Code	A	ORDER BY BOX
14.005.01	5	5
14.005.03	10	5
14.005.04	15	5
14.005.05	20	5
14.005.06	30	5

**Small blade fuses**

Recommended to optimize spaces.

Code	A	ORDER BY BOX
14.006.05	5	100
14.006.10	10	100
14.006.15	15	100
14.006.20	20	100
14.006.30	30	100

**ANL GOLD PLATED fuses**

High capacity. For installation on control propellers and windlasses.

Code	A	PACKAGE	Code	A	PACKAGE
14.100.42	50	10	14.100.48	250	10
14.100.44	100	10	14.100.49	300	5
14.100.52	130	5	14.100.53	325	5
14.100.46	150	10	14.100.50	400	5
14.100.47	200	10	14.100.51	500	5

**MEGA high-capacity standardized fuses**

For voltage up to 32V DC. Maxi fuse for high-capacity electric appliances. It protects the circuit safety.

Code	A	Code	A
14.099.44	100	14.099.47	200
14.099.45	125	14.099.48	250
14.099.46	150	14.099.51	500

**Flying fuse holder**

For 6.3x32-mm glass fuses.

Code	Description
14.115.15	Water-tight fuse holder designed for glass fuses size 6x32 mm
14.182.00	'In-line' flying fuse box for glass fuses size 6x32 mm

**Fuse holder, built-in model**

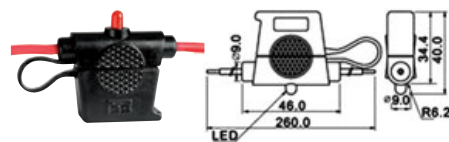
Code	For glass fuses in mm
14.145.00	6.3x32

PVC fuse holder, watertight modelComplete with two 130 mm cables, 4 mm² cross-section.

Code	Max current A
14.115.17	30

Fuse holder, watertight modelHigh-quality in thermorubber for standard lamellar fuses. Complete with 2 cables of 130 mm, section 4 mm².

Code	Max current A	ORDER BY BOX
14.115.19	30	10

Fuse holder with warning LED, watertight modelHigh quality, for standard lamellar fuses. 2 x 110-mm cable capacity, 3-mm² section.

Code	LED	Max capacity A	ORDER BY BOX
14.115.20	1	30	10

Watertight fuse holder for small fusesHigh quality fuse holder for small blade fuses. Fitted with two cables (150 mm each, 3,3 mm² section).

Code	Current draw A	ORDER BY BOX
14.115.21	30	10

