


Rigging screws with two fixed jaws

AISI 316 stainless steel.


Code	Thread D1 MA	L1 mm	A mm	D mm	H mm	LG mm	Breaking load kgF
07.197.04	4	110	5.5	4	8	160	346.5
07.197.05	5	130	6.5	5	10	190	571
07.197.06	6	150	7.5	6	10	220	785
07.197.08	8	165	11	8	11	240	1417
07.197.10	10	190	12	9	14	280	2223
07.197.12	12	245	14	12	20	360	3263
07.197.14	14	270	15	12	22	390	4445
07.197.16	16	310	17	16	26	450	9075

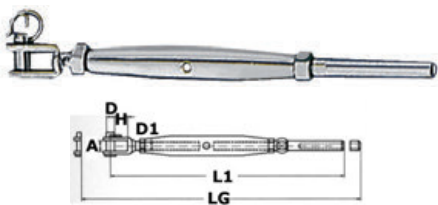

Rigging screws with fixed jaw and press-fitting terminal

AISI 316 stainless steel.

Code	Thread D1	Line Ø mm	L1 mm	A mm	D mm	H mm	LG mm	Working load kg
07.191.06	M6	3	175	7.5	6	10	245	250
07.191.08	M8	4	200	11	8	11	275	350
07.191.10	M10	5	230	12	9	14	320	550
07.191.12	M12	6	285	14	12	20	400	1250

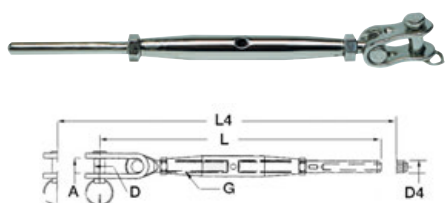

Rigging screws with articulated jaw and press-fitting terminal

AISI 316 stainless steel.


Code	Line Ø mm	G mm	L mm	L4 mm	D4 mm	A mm	D mm	Working load kg
07.202.06	3	6	180	257	6.35	7	6	238
07.202.08	4	8	212	297	7.5	10	8	450
07.202.10	5	10	246	361	9	12	9	625
07.202.12	6	12	292	-	12.5	13	12	925



Rigging screw protectors made of UV-resistant white polyester

Very sturdy, fitted with **hook&loop fastener**, fine and convenient design providing protection for sails and the legs of the crew.

Code	Ø mm	Length mm
07.596.01	30	400
07.596.02	40	500
07.596.03	50	600

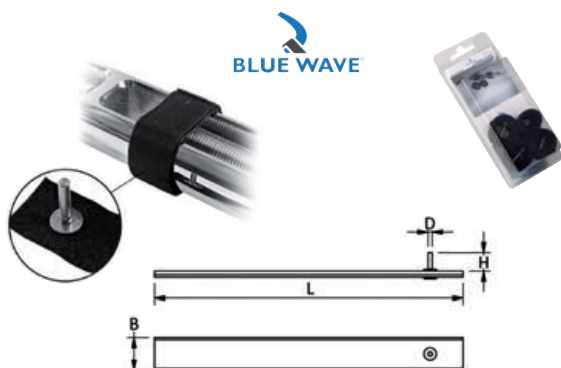

Smart Pins tightening system for turnbuckles

Fast and innovative system, an option to the traditional split pins. Made up of an AISI316 stainless steel pin and a Velcro strap for a safe use of the rigging terminals.

Slip the pin into the terminal hole and tighten the Velcro strap around the bottle screw. **4-pc package.**

Code	Thread size		D mm	H mm	B mm	L mm
	mm	G				
07.597.00	M6	1/4"	2	8	16	100
07.597.01	M8 - M10	5/16" - 3/8"	2.5	10	16	130
07.597.02	M12	7/16" - 1/2"	3.2	13	20	180
07.597.03	M16 - M20	5/8" - 3/4"	4	20	20	220

OSCULATI



▲ 07.595.64/65



▲ 07.595.40/60

Cover trims for shrouds and rigging screws, made of anodized aluminium

Composed of two halves with dovetail joint. End cap in **black nylon** not included. This system **avoids having to dismantle the shrouds** to install the profile. Can be cut as needed. The caps must be fixed with the special pin that also contains the shrouds. The tube must be drilled once cut to size.

Profile	Ø mm	Maximum wire mm	Length m	Cap
07.595.40	40	7	2	07.595.64
07.595.60	60	12	2	07.595.65