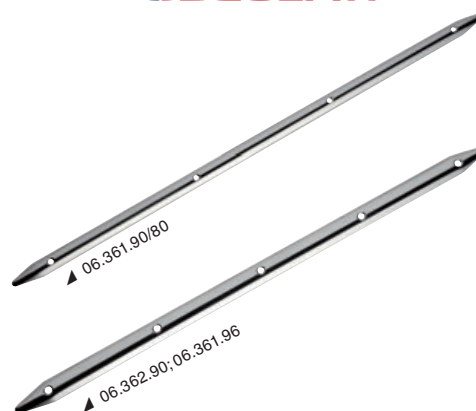


Rubbing strakes

AISI 316

To prevent mooring line chafing. Made of polished AISI316 stainless steel. Moulded and tapered.

Code	Length mm	Width mm	Bore Ø mm
06.361.50	150	20	6
06.361.60	200	20	6
06.361.70	300	20	6
06.361.80	450	20	6
06.361.90	650	20	6
06.361.96	960	20	6
06.362.70	300	25	6
06.362.80	450	25	7
06.362.90	610	25	6

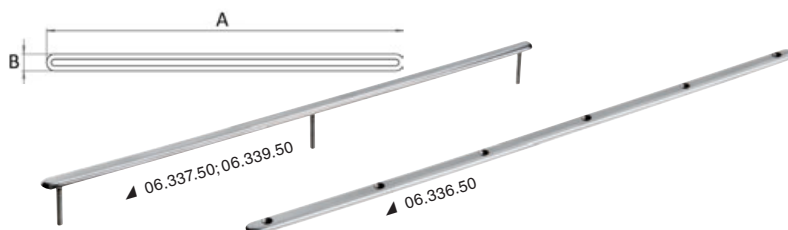

OSCULATI


Deluxe rubbing strake

AISI 316
SOLIDS.S.

They protect against rubbing of the mooring lines. Made of thick mirror-polished AISI316 stainless steel. Available in two versions: with screws or studs.

Code	Length A mm	Width B mm	Fixing	Bore Ø mm	Centre distance mm
06.336.32	320	15	Screws (4)	4	95
06.336.50	500	15	Screws (6)	4	95
06.337.32	320	15	Studs M5x40 (2)	-	290
06.337.50	500	15	Studs M5x40 (3)	-	235
06.339.50 New	500	28	Studs M5x40 (3)	-	235



OSCULATI


D-shape profile

AISI 316

For protection against chafing of mooring lines. Made by precision casting. Fixation with hidden studs (not included).

Code	Length mm	Width mm	Height mm	Stud Ø mm
06.368.30	300	15	15	5


OSCULATI


UHMW adhesive chafe guards

Made of UV-resistant self-adhesive Teflon and can be cut to measure. They prevent wear due to chafing and do not damage gelcoat or painted surfaces.

Code	Content
06.315.00	4 pcs. (100 x 150 mm)


OSCULATI


Adhesive anti-chafe SS sheets

Extremely flexible stainless steel sheets to protect the boat's gelcoat and paint from rope abrasion. Suitable for protecting both mooring lines and running rigging from abrasion. Made of stainless steel with a powerful 3M VHB™ adhesive. Does not damage either gelcoat or paint.

Code	Length mm	Sheet No.	Material
06.313.15	150 x 50	1	Stainless steel
06.313.22	225 x 50	1	Stainless steel

